
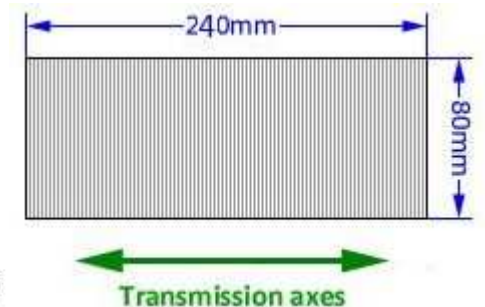
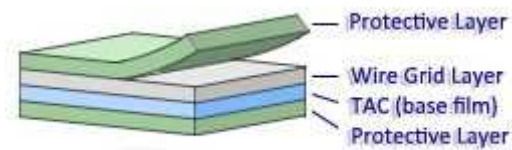


MLP-WG - Specification

Item		Unit	Spec
Size		mm	80+5/-0 × 240+10/-0
Effective Size		mm	80 x 240
Effective Thickness		μm	80
Base Film			TAC
Wire Thickness			< 1μm
Durability	Heat - 105°C x 1000h		Good condition
	Humidity - 60°C x 90%RH x 1500h		
	Heat Cycle 105°C/40°C 8hr/cycle x 50		Good condition Laminated to glass
	Low Temperature - 40°C x 100h		

** RoHS Compliant

■ Spectral transmittance

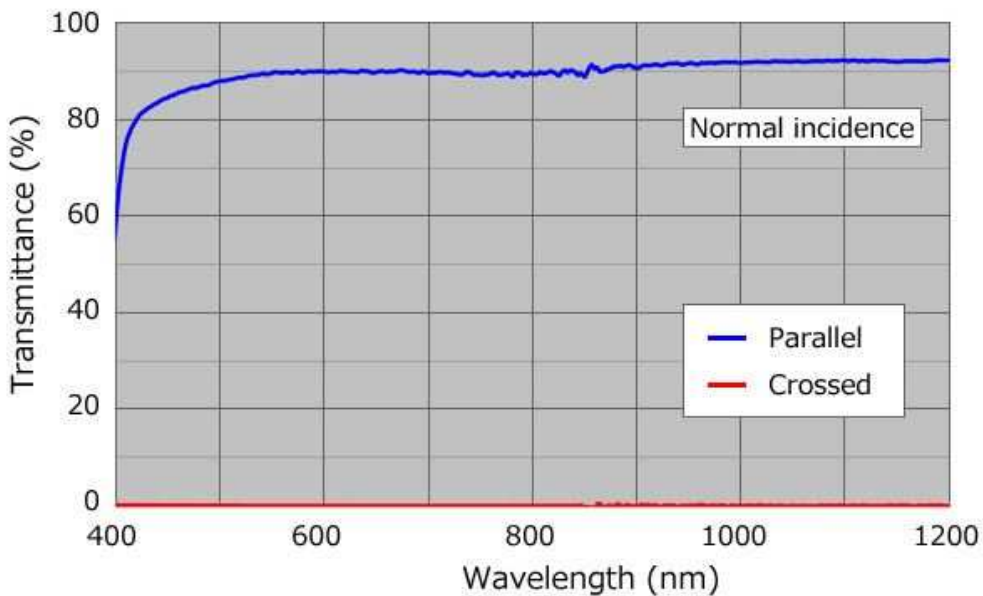

** Actual measurement value, not guaranteed value

Remedies and Limitations

Should any product fail to perform as warranted or for any other claims arising from the purchase of products from us, our liability and your remedy are strictly limited to the purchase price or replacement, at our sole option, of the product sold.

Please refer to website: <http://www.mecanusa.com/order-info.html>