
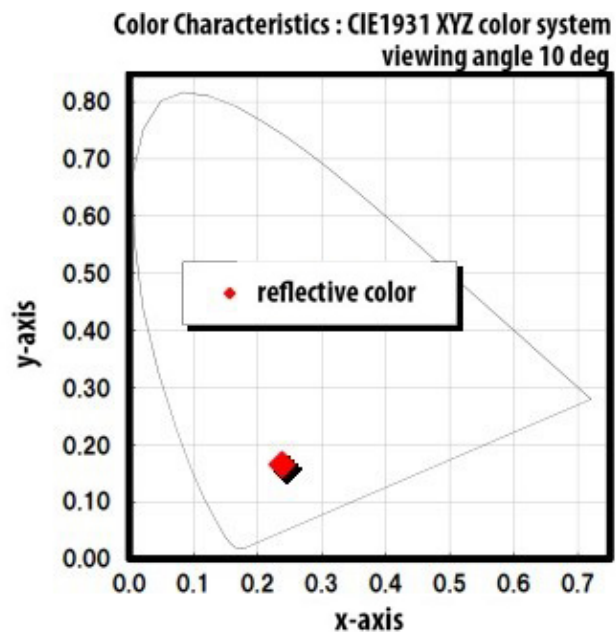


JAR-8/JAR-4 – Specification

Items	Spec	Remarks
Adhesive layer	Soft PSA	
Anti-static layer	✓	
Effective thickness	120µm	
Base film	PET	
Luminous Transmission	94.175%	JIS Z 8722
Luminous Reflectance	0.35%	JIS Z 8722
Water contact angle	113.9	Distilled water used
Pencil strength	2H	JIS K5400
Steel wool - Scratch resistance	No change	#0000SW 200g x 10 round trips
Adhesiveness crosscut	25/25	JIS K5600-5-6
Accelerated Adhesion Test (hot water)	25/25	distilled water 85°C 60min - crosscut method
Surface treatment		Clear
Adhesiveness (N/25 mm)	<0.1	JIS Z0237

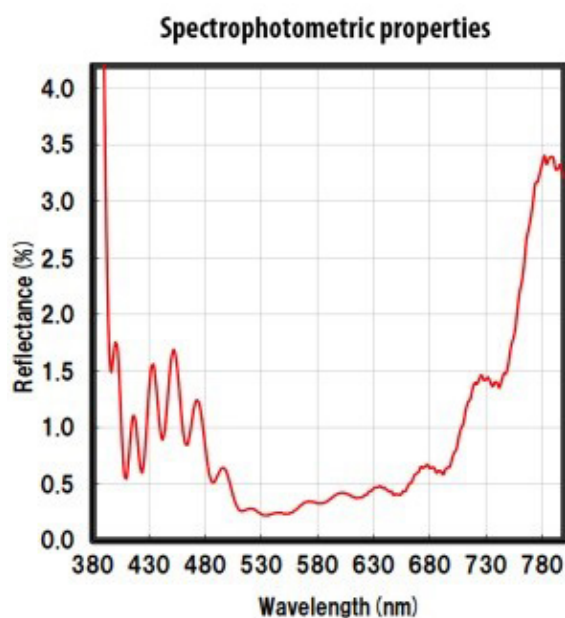

* Measured value, not guaranteed value.

Remedies and Limitations

Should any product fail to perform as warranted or for any other claims arising from the purchase of products from us, our liability and your remedy are strictly limited to the purchase price or replacement, at our sole option, of the product sold.

Please refer to website: <http://www.mecanusa.com/order-info.html>