


MUHD40S - Specification

Item		Unit	Spec	
Size		mm	620 (± 10) x 1000 (+10/-0)	
Effective Thickness		mm	0.215 ± 0.050	
Defective		Per/Sheet	Maximum = 16 per sheet	
Durability	Heat 105°C x 1000h	-	Should not there be visible peeling and bubbles	
	Humidity 80°C x 90%RH x 500h	-		
	Low temperature -40°C x 1000h	-		
Optical Properties	Single transmittance average	%	40.0 ± 2.5% (36.50 - 40.50)	
	Crossed transmittance	%	0.06%	
	Polarization	%	More than 99.0% *Measured value average 99.97 Not guaranteed value	
	Hue	L *	-	61.64 ± 2.0 (59.64 - 63.64)
		a *	-	-1.5 ± 2.0 (-3.5-0.5)
b *		-	5.0 ± 2.0 (3.0-7.0)	

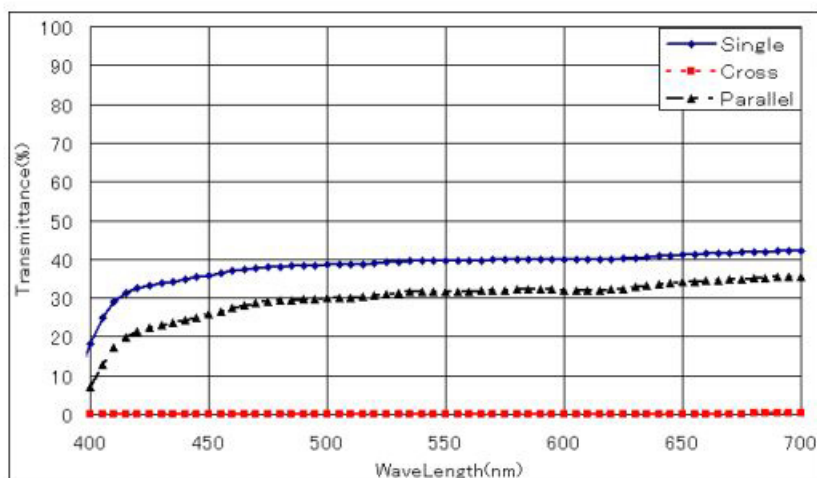

* deta is actual measurement value, not guaranteed value

Remedies and Limitations

Should any product fail to perform as warranted or for any other claims arising from the purchase of products from us, our liability and your remedy are strictly limited to the purchase price or replacement, at our sole option, of the product sold.

Please refer to website: <http://www.mecanusa.com/order-info.html>