


SHLP41N – Specification

Item		Unit	Spec
Size		mm	W630 ± 10 Roll
Effective Thickness		μm	185 ± 15
Durability	Heat resistance (80℃)	Hours	500
	Humidity resistance (60℃90%RH)	Hours	
	Low Temperature resistance (–30℃)	Hours	
Optical Properties	Single transmittance		42.3 ± 1.5%
	Cross transmittance		Less Than 0.03%
	Polarizing co-efficiency		More than 99.8%
	Single Hue	a *	–1.5 ± 1.5 (NBS)
		b *	4.0 ± 1.5 (NBS)
	UV-Cut		Less than 1.0% (at 380nm)

Change of value on single Transmittance and polarizing co-efficiency $\leq \pm 5.0\%$

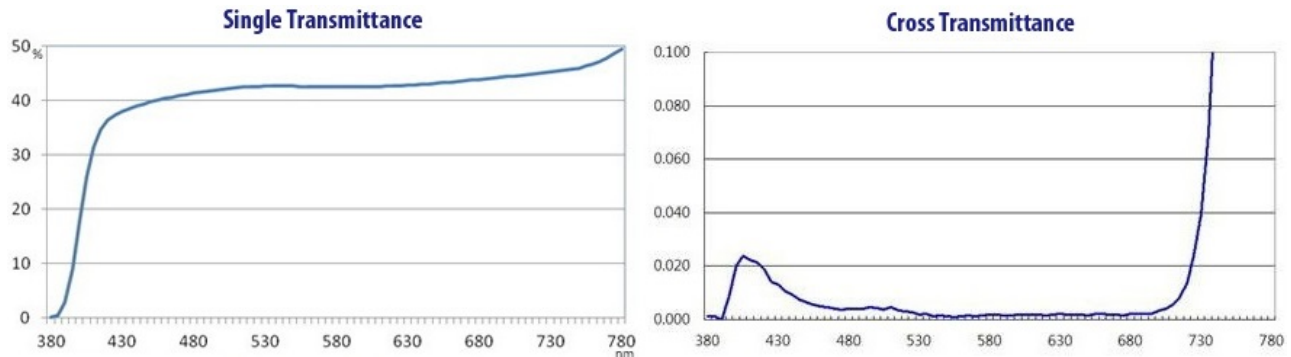

** Actual measurement value, not guaranteed value

Remedies and Limitations

Should any product fail to perform as warranted or for any other claims arising from the purchase of products from us, our liability and your remedy are strictly limited to the purchase price or replacement, at our sole option, of the product sold. Please refer to website: <http://www.mecanusa.com/order-info.html>